
All Nylon Nylon/Steel

Mushroom Head Drive Pin Anchor

Rivets

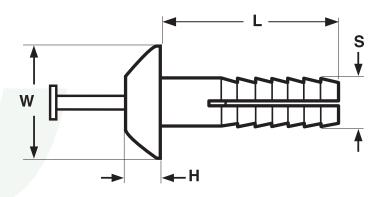

Nominal Diameter	v	V		н	s	
	Head Width		Head Height		Shank Diameter	
	Max	Min	Max	Min	Max	Min
10	.568	.558	.115	.105	.203	.173
1/4	.568	.558	.115	.105	.265	.235

Description	A fastening system which consists of two parts: (1) a nylon component which has a cylindrical shank split on two sides, 180° apart, extending from the bottom of the shank up most of the distance to the head. The shank has several ribs extending completely around its circumference. Mushroom head style has a gently rounded top surface and flat bearing surface. (2) a pin expander (which may be steel or nylon) which passes through a concentric channel extending from an opening in the top of the head of the nylon piece down into the shank to a point just below the spot where the split ends below the head. The steel pin has a slot across the top of its head, a chiseled point similar to a nail, and threads on its own shank which helps to lock the anchor in place upon installation. The nylon pin has a smooth, flat top and smooth shank.
Applications/ Advantages	An economical multipurpose blind fastener for use in predrilled hole and installed with a hammer. Provides resistance to electrical conductivity, vibration and corrosion. Can be used in floor plates, truck trailers, plumbing fixtures, window/drapery hardware and storage shelves. The mushroom head variety can be used in most applications. Steel pin variety offers greater pull-out strength.
Material	All Plastic style: Nylon 6/6 impact modified Plastic Rivet/Steel Pin style: Rivet-Nylon 6/6 impact modified, Pin- Carbon Steel w/ Zinc Plate
Melting Point	500° F