


SELF- TAPPING SCREWS

Flat Hd w/Nibs,
Square Recess

DECK SCREWS W/TYPE-17 POINT

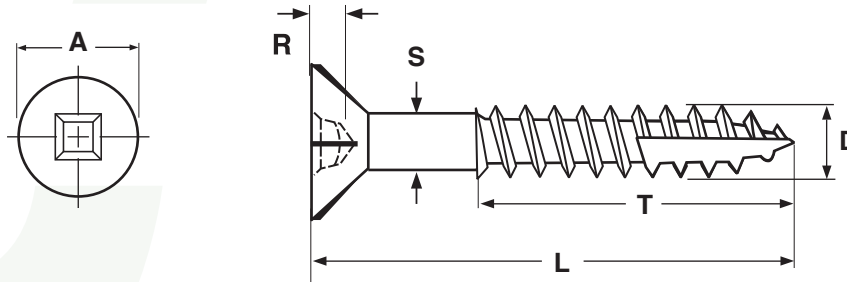

FLAT HD W/NIBS, SQUARE RECESS DECK SCREW WITH TYPE-17 POINT

| Nominal Diameter | A | | R | | D | | S | Recess Size |
|---------------------|---------------|-------------------|--------------|------------|-----------------------|-------|-------------------|-------------|
| | Head Diameter | | Recess Depth | | Major Thread Diameter | | Shoulder Diameter | |
| | Max | Min | Max | Min | Max | Min | Ref | |
| 6 | 0.262 | 0.237 | 0.065 | 0.040 | 0.142 | 0.131 | 0.104 | 1 |
| 8 | 0.311 | 0.286 | 0.075 | 0.064 | 0.177 | 0.157 | 0.124 | 2 |
| 9 | 0.336 | 0.308 | 0.075 | 0.064 | 0.177 | 0.169 | 0.126 | 2 |
| 10 | 0.378 | 0.341 | 0.075 | 0.064 | 0.199 | 0.186 | 0.137 | 2 |
| | | | | | | | | |
| Tolerance on Length | | Up to 1.25" | | +0 / -0.05 | | | | |
| | | Over 1.25 to 2.5" | | +0 / -0.07 | | | | |
| | | Over 2.5 to 4" | | +0 / -0.10 | | | | |

| | |
|----------------------------------|---|
| Description | An externally threaded fastener with a countersunk head, square socket recess and a single lead thread. The bearing surface of the countersink has several equidistant nibs running down the underside of the head from the top, outer edge. The shank has a full body diameter and a chip cavity cut out where the final several threads end at the tip. |
| Applications / Advantages | The deeper thread design offers greater resistance to pull-out forces. The chip cavity (or auger point) enables the fastener to drive—especially in denser woods—without pre-drilling a pilot hole. |
| Material | 18-8 Stainless steel |
| Plating | Stainless Deck screws have a commercial passivation. |