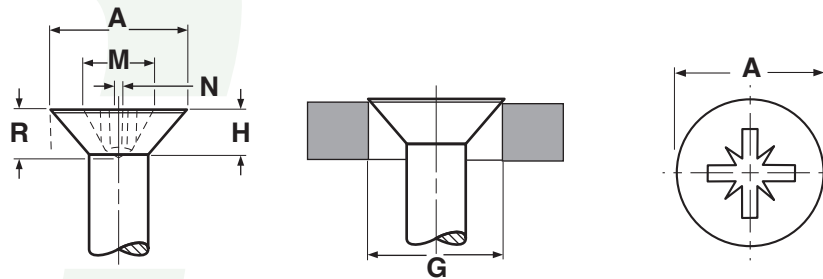


SELF-TAPPING SCREWS


HEAD DIMENSIONS

Flat Pozidriv®
Pan Pozidriv®

POZIDRIV® (TYPE 1A) FLAT HEADS FOR SELF-TAPPING SCREWS

ASME B18.6.3-
2013

| Nominal Size | A | | H | | M | R | N | Recess Penetration Gaging Depth | | F | | G | Driver Size |
|--------------|-----------------|------|--------|------|-------------------|-------|-------|---------------------------------|------|----------------------------------|------|------|-------------|
| | Head Dimensions | | | | Recess Dimensions | | | | | Protrusion Above Gaging Diameter | | | |
| | Diameter | | Height | | Diam. | Depth | Width | Max | Min | Max | Min | | |
| | Max | Min | Max | Min | Ref | Ref | Ref | | | | | | |
| 2 | .162 | .144 | .051 | .040 | .096 | .055 | .029 | .053 | .037 | .029 | .017 | .124 | 1 |
| 4 | .212 | .191 | .067 | .055 | .122 | .081 | .030 | .079 | .063 | .032 | .019 | .172 | 1 |
| 6 | .262 | .238 | .083 | .069 | .168 | .098 | .041 | .091 | .073 | .036 | .021 | .220 | 2 |
| 8 | .312 | .285 | .100 | .084 | .182 | .112 | .041 | .107 | .089 | .039 | .023 | .267 | 2 |
| 10 | .362 | .333 | .116 | .098 | .198 | .127 | .041 | .122 | .104 | .042 | .025 | .313 | 2 |
| 12 | .412 | .380 | .132 | .112 | .262 | .149 | .056 | .136 | .118 | .045 | .027 | .362 | 3 |
| 1/4 | .477 | .442 | .153 | .131 | .276 | .164 | .057 | .151 | .133 | .050 | .029 | .424 | 3 |
| 5/16 | .597 | .556 | .191 | .165 | .358 | .211 | .086 | .193 | .175 | .057 | .034 | .539 | 4 |
| 3/8 | .717 | .670 | .230 | .200 | .386 | .239 | .086 | .222 | .204 | .065 | .039 | .653 | 4 |

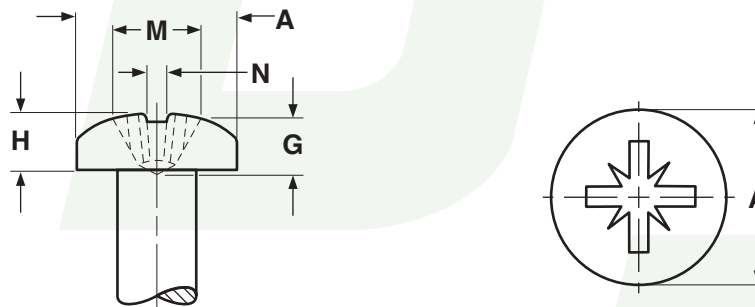

POZIDRIV® (TYPE 1A) PAN HEADS FOR SELF-TAPPING SCREWS

ASME B18.6.3-2013

| Nominal Size | A | | H | | M | | G | | N | Recess Penetration Gaging Depth | | Driver Size |
|--------------|---------------|------|----------------|------|----------------------|------|-------|------|-------|---------------------------------|------|-------------|
| | Head Diameter | | Height of Head | | Dimensions of Recess | | | | | | | |
| | | | | | Diameter | | Depth | | Width | | | |
| | Max | Min | Max | Min | Max | Min | Max | Min | Min | | | |
| 2 | .167 | .155 | .062 | .053 | .104 | .091 | .064 | .048 | .028 | .053 | .037 | 1 |
| 4 | .219 | .205 | .080 | .070 | .122 | .109 | .083 | .067 | .029 | .072 | .056 | 1 |
| 6 | .270 | .256 | .097 | .087 | .162 | .149 | .092 | .074 | .040 | .076 | .058 | 2 |
| 8 | .322 | .306 | .115 | .105 | .177 | .164 | .108 | .090 | .041 | .092 | .074 | 2 |
| 10 | .373 | .357 | .133 | .122 | .193 | .180 | .124 | .106 | .041 | .108 | .090 | 2 |
| 12 | .425 | .407 | .151 | .139 | .254 | .241 | .139 | .121 | .056 | .117 | .099 | 3 |
| 1/4 | .492 | .473 | .175 | .162 | .273 | .260 | .159 | .141 | .057 | .137 | .119 | 3 |

Pozidriv® is a registered trademark of the Phillips Screw Company. Our Type-1A drive fasteners are not manufactured by or connected with the producer of Pozidriv® screws.