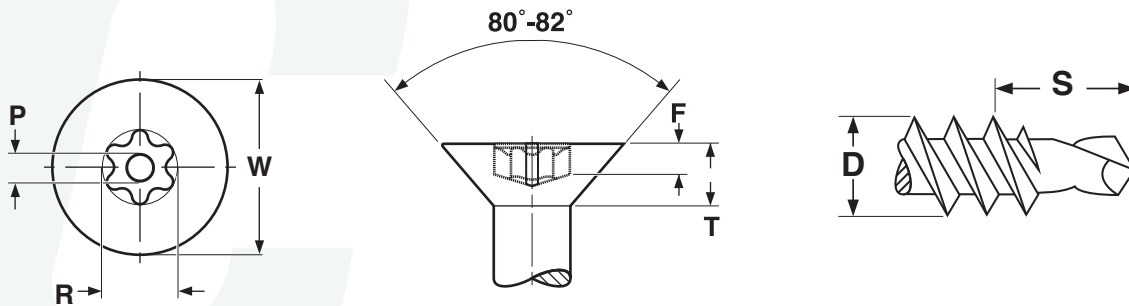


SELF-TAPPING SCREWS

SECURITY SELF-DRILLING

Flat Head
Six Lobe Recess

SIX-LOBE PIN-IN FLAT HEAD SELF-DRILLING SECURITY SCREWS

Nominal Size & Threads per Inch	W		T	R	P	F	D		S	Point Style	Driver Size
	Head Dimensions			Recess Dimensions			Major Thread Diameter		Point Length		
	Head Diameter		Head Height	Recess Width	Pin Diameter	Gauge Penetration					
	Max	Min	Ref	Ref	Ref	Min	Max	Min	Ref		
8-18	.312	.285	.100	.132	.040	.040	.166	.161	.211	#2	T15
10-16	.362	.333	.116	.155	.055	.050	.189	.183	.235	#2	T20
12-14	.412	.380	.132	.178	.070	.055	.215	.209	.353	#3	T25
10-24	.362	.333	.116	.155	.055	.050	.1900	.1818	.193	#2	T20
Tolerance on Length	Up to 3/4" length, incl.						1" and longer				
	+0, -.03						+0, -.05				