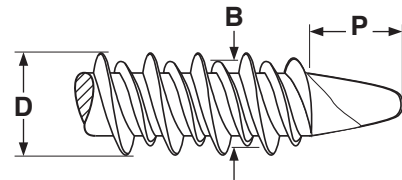




## SELF-TAPPING SCREWS

## SELF-DRILLING

Wafer Phillips  
High-Low w/ Spade Pt.

## WAFER PHILLIPS SPADE POINT HIGH-LOW SELF DRILLING SCREWS WITH NIBS UNDER HEAD




Screw Size	Threads per Inch	A		R		I		D		B		P		Phillips Drive Size
		Head Diameter		Recess Diameter		Recess Depth		Major Thread Diameter		Minor Thread Diameter		Point Length		
		Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	
8	18	.417	.377	.209	.196	.148	.123	.201	.182	.169	.149	.228	.208	2
Tolerance on Length								± 0.03"						

<b>Description</b>	A countersunk, flat head screw with a double lead, consisting of a high and low thread; and spade-shaped point designed to drill its own hole. The head has eight protrusions, or nibs, equidistantly spaced from each other, that run from the outer edge of the head down the cone-shaped bearing surface.
<b>Applications/Advantages</b>	Specifically designed for attaching cement board to plywood.
<b>Material</b>	AISI 1018 - 1022 steel
<b>Case Depth</b>	.004 minimum
<b>Surface Hardness</b>	Vickers HV 450 - 800
<b>Core Hardness</b>	Vickers HV 290 - 450
<b>Recommended Torque</b>	45 kg/cm minimum
<b>Finish</b>	Screws have a green ceramic coating intended to withstand a salt-spray test of 500 hours.

## SELF- TAPPING SCREWS

Wafer Phillips w/  
Drill Point

## SELF-DRILLING



## WAFER PHILLIPS SELF DRILLING SCREWS WITH NIBS UNDER THE HEAD

Screw Size	Threads per Inch	A		R		I		D		P	Phillips Drive Size	
		Head Diameter		Recess Diameter		Recess Depth		Major Thread Diameter		Point Length		
		Max	Min	Max	Min	Max	Min	Max	Min	Min		
8	18	.417	.377	.209	.196	.148	.123	.169	.157	.156	2	
Tolerance on Length								± 0.03"				

<b>Description</b>	A countersunk fastener with a flat head, spaced threads and self drilling point. The head has eight protrusions, or nibs, equidistantly spaced from each other, that run from the outer edge of the head down the cone-shaped bearing surface.
<b>Applications/ Advantages</b>	Specifically designed for attaching cement board to metal studs of a thickness from 14-20 gauge.
<b>Material</b>	AISI 1018 - 1022 steel
<b>Case Depth</b>	.004 minimum
<b>Surface Hardness</b>	Vickers HV 450 - 800
<b>Core Hardness</b>	Vickers HV 290 - 450
<b>Recommended Torque</b>	45 kg/cm minimum
<b>Finish</b>	Screws have a green ceramic coating intended to withstand a salt-spray test of 500 hours.