
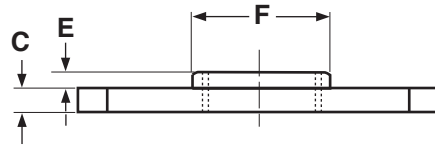


# WELD NUTS

## CENTER HOLE - WITHOUT PROJECTIONS

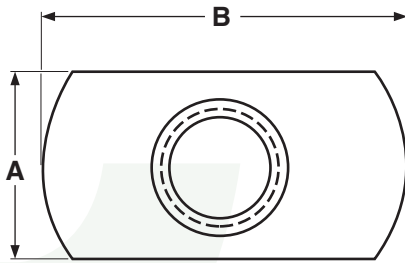

WELD NUTS, CENTER HOLE DESIGN WITHOUT PROJECTIONS						Paulin®
Size	A	C	B	F	E	Pilot Hole
	Width	Thickness	Length	Pilot Diameter	Pilot Height	
6-32	.453	.098	.890	.198	.042	.203
	.433	.088	.860	.178	.026	
8-32	.453	.098	.890	.213	.042	.219
	.433	.088	.860	.193	.026	
10-24	.453	.098	.890	.244	.042	.250
	.433	.088	.860	.224	.026	
10-32	.453	.098	.890	.244	.042	.250
	.433	.088	.860	.224	.026	
1/4-20 (14NWS2T)	.453	.098	1.015	.307	.042	.312
	.433	.088	.985	.272	.026	
1/4-20 (14NWS2)	.520	.130	1.140	.307	.062	.312
	.495	.120	1.110	.287	.046	
5/16-18	.655	.145	1.515	.369	.092	.375
	.620	.135	1.485	.349	.075	
3/8-16	.655	.145	1.515	.448	.092	.453
	.620	.135	1.485	.428	.075	
1/2-13	.827	.192	1.515	.599	.102	.609
	.797	.178	1.485	.569	.085	

<b>Description</b>	A four-sided, internally threaded fastener with rounded edges at the two ends most opposite each other. The threaded hole runs through the center and has a pilot for the entire circumference of the opening which extends above the flat surface of the nut. The remaining top surface of the nut is flat.
<b>Applications/ Advantages</b>	The center hole design enables this nut to bridge corners or depressions offering additional strength. The tabs allow the installer to use multiple sizes of electrodes, thus improving efficiency by reducing equipment changes. The height of the pilot minimizes the amount of welding residue that could clog the threads.
<b>Material</b>	1006 - 1010 Low Carbon Steel

Paulin® is a registered trademark of Paulin Industries, Inc.  
470