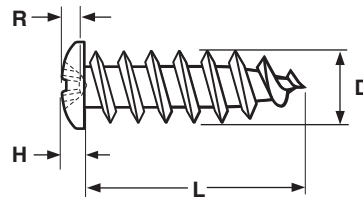


WOOD SCREWS

DEEP THREAD

Low-Profile Pan Head w/
Phillips Recess

LOW PROFILE PAN PHILLIPS RECESS DEEP THREAD WOOD SCREW									
Nominal Diameter & Threads per Inch	A		H		D		T		Recess Size
	Head Diameter		Head Height		Major Diameter		Threaded Length		
	Max	Min	Max	Min	Max	Min	L ≤ 1"	L > 1"	
6-13	0.270	0.256	0.082	0.074	0.141	0.135	Full thread	2/3 thread	#2
Tolerance on Length		Up to 5/8"				± 0.03			

Description	An externally threaded fastener with a dome-shaped head, cross recess and a single lead thread. The shank has a reduced diameter and a chip cavity cut out where the final several threads end at the tip.
Applications / Advantages	The deeper thread design offers greater resistance to pull-out forces. The low-profile head design enables moving sections to pass over each other without interference.
Material	C1018 - 1022 case-hardened steel
Surface Hardness	Vickers 450 HV minimum
Case Depth	0.004" - 0.009"
Plating	See Appendix-A for plating information