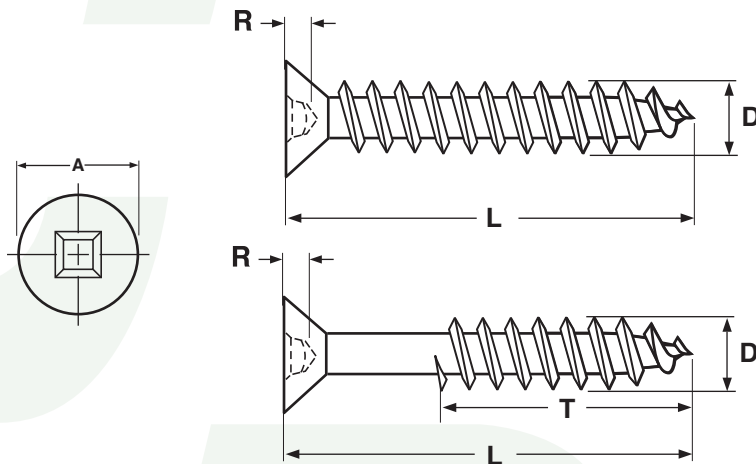


WOOD SCREWS

DEEP THREAD

Flat Head w/
Square Recess

FLAT SQUARE RECESS DEEP THREAD WOOD SCREW

Nominal Diameter	A		R		D		T		Recess Size
	Head Diameter		Recess Depth		Major Diameter		Threaded Length		
	Max	Min	Max	Min	Max	Min	L ≤ 1"	L > 1"	
6	0.279	0.244	0.065	0.057	0.152	0.142	Full thread	2/3 thread	#2
8	0.332	0.292	0.075	0.065	0.174	0.164	Full thread	2/3 thread	#2
Tolerance on Length	Up to 5/8"								+0 / -0.03
	Over 5/8 to 1.5"								+0 / -0.05
	Over 1.5 to 2.75"								+0 / -0.06
	Over 2.75 to 5"								+0 / -0.09

Description	An externally threaded fastener with a countersunk head, square socket recess, a single lead thread. The shank has a reduced diameter.
Applications / Advantages	The deeper thread design offers greater resistance to pull-out forces. Square recess is preferred in many overhead installations.
Material	C1022 case-hardened steel
Surface Hardness	Rockwell C 45 minimim
Case Depth	0.004" - 0.009"
Torque	#6 Diameter: 21 kg/cm minimum; #8 Diameter: 35 kg/cm minimum
Plating	See Appendix-A for plating information