


WOOD SCREWS

Pan Head w/ Square-Phillips Recess **TYPE-17 DEEP THREAD**

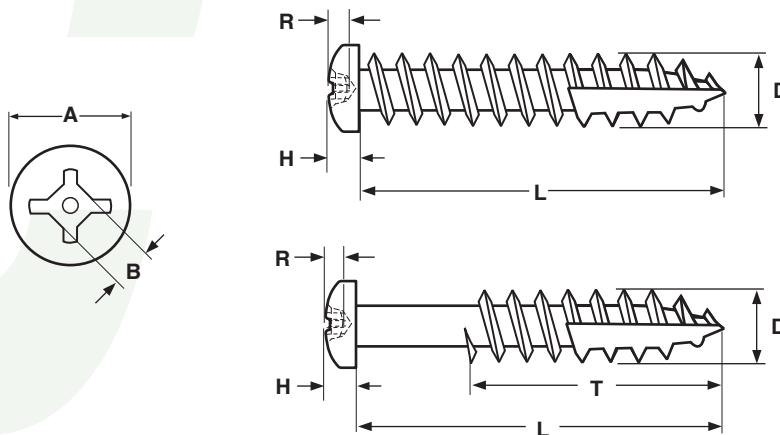

PAN SQUARE-PHILLIPS RECESS DEEP THREAD WOOD SCREW WITH TYPE-17 POINT														
Nominal Diameter	A		H		R		B	D		T		Breaking Torque (kg-cm)	Recess Size	
	Head Diameter		Head Height		Recess Depth		Recess Diameter	Major Diameter		Threaded Length			Min	Square
	Max	Min	Max	Min	Max	Min	Ref	Max	Min	L ≤ 1"	L > 1"	Min		Square
6	0.270	0.256	0.103	0.093	0.065	0.050	-	0.141	0.135	Full thread	2/3 thread	21	#1	#2
8	0.322	0.306	0.115	0.105	0.080	0.060	0.112	0.169	0.159	Full thread	2/3 thread	37	#2	#2
10	0.373	0.357	0.133	0.122	0.087	0.065	0.112	0.194	0.185	Full thread	2/3 thread	55	#2	#2
Tolerance on Length			Up to 5/8"								± 0.03			
			Over 5/8 to 1.5"								± 0.05			
			Over 1.5 to 2.75"								± 0.06			
			Over 2.75"								± 0.09			

Description	An externally threaded fastener with a dome-shaped head, crossed recess that will also accept a square driver bit and a single lead thread. The shank has a reduced diameter.
Applications / Advantages	The deeper thread design offers greater resistance to pull-out forces as compared to standard wood screws. Popular in fastening cabinet hardware in locations that do not require the head to countersink. The recess design allows for multiple drive tools.
Material	C1018 - 1022 case-hardened steel
Surface Hardness	Vickers 450 HV minimum
Case Depth	0.004" - 0.009"
Torque	See values in above table
Plating	See Appendix-A for plating information