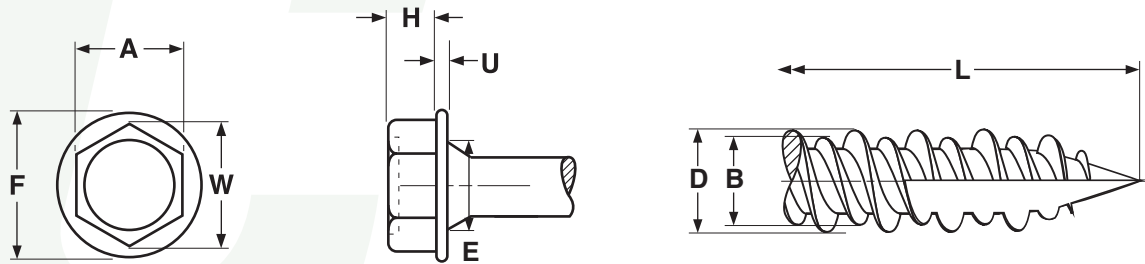


WOOD SCREWS

POLE GRIP SCREW

High Hex Washer Head
w/ High-Low Thread

HEX WASHER HEAD, HIGH-LOW POLE GRIP SCREW w/TYPE-17 POINT

Nominal Diameter and Threads per Inch	A		W	H		F		U		D		B	E
	Width Across The Flats		Width Across Corners	Head Height		Washer Diameter		Washer Thickness		High Thread Diameter		Low Thread Diameter	Shoulder Diameter
	Max	Min	Min	Max	Min	Max	Min	Max	Min	Max	Min	Ref	Ref
10 - 14	.250	.243	.271	.145	.129	.347	.321	.035	.029	.198	.185	.145	.175
Tolerance on Length										+ 0.06, - 0			

Description	An externally threaded steel fastener with an integrally formed hex washer head screw whose head is 10-20% higher than a standard hex washer head. The thread pattern has a double-lead, consisting of a high and low thread. The lower thread diameter is approximately 80% that of the higher thread. There is a chip cavity cut out of the final several threads, ending with a tip that has a piercing point. Beneath the head is an unthreaded shoulder.
Applications / Advantages	Used to install metal roofing and siding to wood. With special coating applied to the steel screw, the fastener provides a high degree of corrosion resistance (at least 1,000 hours salt-spray rated). It can also be used in pressure-treated lumber.
Material	C1022 or equivalent case-hardened steel
Surface Hardness (screw)	450 HV minimum
Case Depth (screw)	.004 - .009
Core Hardness (screw)	320 - 425 HV
Plating	Steel screw has a finish to withstand a 1,000-hour salt-spray test.