
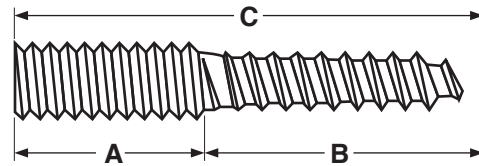


CAP SCREWS & BOLTS

HANGER BOLTS

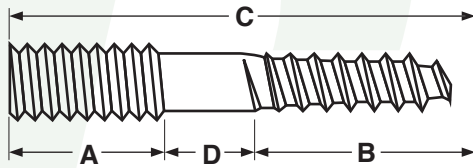

HANGER BOLTS														Hanger Bolt & Stud										
Diameter & Thread Pitch	C		A		B		D		Diameter & Thread Pitch	C		A		B		D								
	Standard Length	Machine Thread Length	Lag Thread Length	Center Space	Standard Length	Machine Thread Length	Lag Thread Length	Center Space		Standard Length	Machine Thread Length	Lag Thread Length	Center Space											
6-32	5/8	1/4	3/8	-	1/4-20	2	1	1	-	3/8-16	1-1/2	1/2	1	-	5/16-18	2	1	1	-					
	3/4	3/8	3/8	-		2-1/4	1	1-1/4	-		2-1/2	1	1-1/2	-		2-1/2	1	1-1/2	-	3	1-1/2	1-1/2	-	
	7/8	1/4	5/8	-		2-1/2	1	1-1/2	-		3	1-1/2	1-1/2	-		3-1/2	1-1/2	2	-	4	2	2	-	
	1	3/8	5/8	-		3	1-1/2	1-1/2	-		4	2	2	-		4-1/2	1-1/8	3	3/8	4-1/2	1-1/8	3	3/8	-
8-32	5/8	1/4	3/8	-		4-1/2	1-1/8	3	3/8		5	1-3/8	3	5/8		5-1/2	1-1/2	3	1	6	1-1/4	3	1-3/4	-
	3/4	3/8	3/8	-		5	1-3/8	3	5/8		6	1-1/2	3	1-1/2		6	1-1/4	3	1-3/4	8	2-1/2	3	2-1/2	-
	7/8	1/4	5/8	-		1-1/2	5/8	7/8	-		1-3/4	3/4	1	-		10	2-1/2	3	4-1/2	12	2-1/2	3	6-1/2	-
	1	3/8	5/8	-		2	1	1	-		2	1	1	-		14	2-1/2	3	8-1/2	3	1	2	-	-
	1-1/4	5/8	5/8	-		2-1/4	1	1-1/4	-		3-1/2	1-1/2	1-1/2	-		3-1/2	1-1/2	2	-	4	2	2	-	-
	1-1/2	5/8	7/8	-		3	1-1/2	1-1/2	-		3-3/4	1-3/4	2	-		5	2	3	-	6	2-1/2	3	1/2	-
	1-3/4	3/4	1	-		4	2	2	-		4-1/2	1-1/8	3	3/8		8	2-1/2	3	2-1/2	10	2-1/2	3	4-1/2	-
2	1	1	-	4-1/2		1-1/8	3	3/8	5		1-3/8	3	5/8	12		2-1/2	3	6-1/2	1-1/2-13	3	1	2	-	-
10-24	1	3/8	5/8	-	5-1/2	1-1/2	3	1	6		1-1/2	3	1-1/2	6		2-1/2	3	1/2	8	2-1/2	3	2-1/2	-	
	1-1/4	5/8	5/8	-	6	1-1/2	3	1-1/2	10		2-1/2	3	4-1/2	12		2-1/2	3	6-1/2	12	2-1/2	3	6-1/2	-	
	1-1/2	5/8	7/8	-	1-1/2	5/8	7/8	-	1-3/4	3/4	1	-	2	1	1-1/2	-	3	1-1/2	1-1/2	-	-			
	1-3/4	3/4	1	-	2	1	1	-	2	1	1	-	3	1-1/2	1-1/2	-	4	2	2	-	-			
1/4-20	1	3/8	5/8	-	3-1/2	1-1/2	2	-	3-3/4	1-3/4	2	-	4	2	2	-	5	2	3	-	-			
	1-1/4	5/8	5/8	-	4	2	2	-	4-1/2	1-1/8	3	3/8	6	2-1/2	3	1/2	8	2-1/2	3	2-1/2	-			
	1-1/2	5/8	7/8	-	5	1-3/8	3	5/8	5-1/2	1-1/2	3	1	10	2-1/2	3	4-1/2	12	2-1/2	3	6-1/2	-			
	1-3/4	3/4	1	-	6	1-1/2	3	1-1/2	6	1-1/2	3	1-1/2	12	2-1/2	3	6-1/2	1-1/2-13	3	1	2	-	-		

<b>Tolerance on Length</b>		Up to 6": ± 1/16"	Over 6": ± 1/8"
<b>Description</b>	Bolt with threaded areas at both ends-lag screw thread at one end and unified thread at the other. Standard hanger bolts are designed for insertion into a predrilled pilot hole. The end of the wood thread is designed as a taper which is threaded all the way to its blunt tip.		
<b>Applications / Advantages</b>	Designed to hang material from wooden structures. The lag is wrenched into the wood and the assembly is completed after applying a nut. Used for suspending electrical wiring and sheet metal. Also common in the furniture industry.		
<b>Material</b>	<b>Steel:</b> AISI 1008 & 1010 steel <b>Stainless:</b> Type 303 or 304 stainless steel		
<b>Core Hardness (Steel only)</b>	<b>No. 10 through 1/2 in. diameter, all lengths:</b> Rockwell B80 - B100		
<b>Tensile Strength (Steel only)</b>	<b>No. 10 through 1/2 in. diameter, all lengths:</b> 74,000 psi. minimum (applies only to stresses applied to the Unified thread-side of the fastening)		
<b>Plating</b>	See Appendix-A for plating information.		